

ECOWATER  
SYSTEMS®



Your Water. Perfected.

Let us

Perfect

your water and

Maximize

your peace of mind.

## ETF2300

ECOWATER SERIES – WATER FILTRATION SYSTEMS

### Proven System for Removing Iron and Treating Problem Water

**1 Electronic Timer Controls with HydroLinkPlus® Wi-Fi and Smartphone App Monitoring**

Wi-Fi enabled technology sends continuous and excessive water use, system error and service reminder alerts, including a water-to-drain sensing alert notifying you when an excessive amount of water is going to drain.

**Water Meter**

Allowing for chemical feed dosing, flow switch operation and water use information.

**2 Full One-Inch Riser**

One-inch diameter for increased flow rates, which ensures that household demand is adequately met.

**3 Multi-Wrap Fiberglass Reinforced Media Tank**

Durable fiberglass-wrapped tank liner – doesn't deteriorate, rust, or corrode.

**4 Self-Cleaning Distributors**

Distributors exhibit excellent flow rates and are cleaned automatically by counter-current water pressure.

**5 Choose Media for Custom Applications**

**6 Washed Quartz Underbedding**

Washed quartz underbedding aids in dispersion of water throughout the media tank.


**7 Bypass Valve (optional)**

Brass-free and lead-free bypass valve lets you manually bypass the system.

**Fully Ported One-Inch Valve with Easy-Clamp Ring and Patented Disc.**

**Energy Efficient Power Supply**

Simplifies installation, maintenance and reduces electrical hazards.

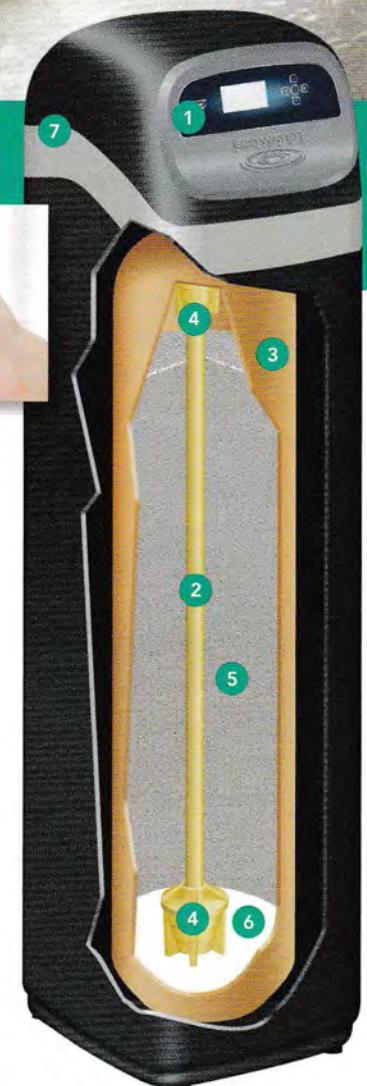


Designed, Engineered & Assembled in the U.S.A.

ecowater.com

# ETF2300 (PF10 & PF12, IF10)

ECOWATER SERIES  
WATER FILTRATION SYSTEMS

## DIMENSIONS

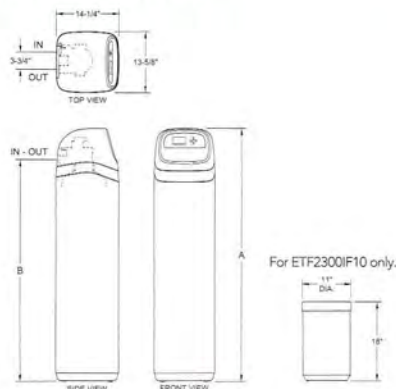

	ETF2300 IF10 & PF10	ETF2300 PF12
Nominal Resin Tank Size	10" Diam. x 47"	12" Diam. x 54"
A	57"	62 <sup>1</sup> / <sub>5</sub> "
B	50"	55 <sup>3</sup> / <sub>4</sub> "

## SPECIFICATIONS

### Multi-purpose Filters (3 media choices)

**Sediment Removal** Service Water Flow Rate (gpm)  
Type of Media: Filter Aggregate Contaminant Limits

**Acid Neutralizer** Service Water Flow Rate (gpm)  
Type of Media: Neutralite Lower pH Limit

**Taste and Odor Removal** Service Water Flow Rate (gpm)  
Type of Media: Activated Carbon Contaminant Limits

Amount Media Recommended (cu. ft.)

Amount Washed Quartz (lbs.)

Supply Water Pressure Limits (psi)

Supply Water Temperature Limits (°F/ °C)

Minimum Inlet Water Flow (gpm) – Required for backwash and fast rinse on media listed above.\*

\*Check with media manufacturer for other media requirements.

### Iron Filter

Iron Removal (media)

Iron Removal Limits (ppm)

Amount Media Recommended (cu. ft.)

Service Flow Rate (gpm)

Supply Water Pressure Limits (psi)

Supply Water Temperature Limits (°F/ °C)

Maximum Inlet Water Flow, Backwash and Fast Rinse Flow to Drain (gpm)

Media Regenerant Material

Amount Used Each Recharge (oz.)

\*\*Not for use or sale in California.

### ETF2300PF10

4 Based on water analysis

8  
6.0

8 Based on water analysis

1 to 1<sup>1</sup>/<sub>4</sub>

17

20-125

40-120 / 4-49

5

### ETF2300IF10

Birm\*\* (Ferrite), MTM\*\* or Manganese Treated Green Sand

20

1 to 1<sup>1</sup>/<sub>4</sub>

8

20-125

40-120 / 4-49

7

Potassium Permanganate

2

### ETF2300PF12

4 – 8

8  
6.0

8

2

29

20-125

40-120 / 4-49

7

